XS-F1620/F6920

6½˝ & 6 x 9˝ 2-Way Speakers

- Ω 140 W Max Input Power
- Ω 6½" Polypropylene Woofer
- Ω 1 3/16" Balanced Dome Tweeter
- Ω High Efficiency (90dB/W/m)
- Ω Low Profile 1¾" Depth

- Ω 160 W Max Input Power
- Ω 6 x 9" Polypropylene Woofer
- Ω 1 7/16" Balanced Dome Tweeter
- Ω High Efficiency (90dB/w/m)
- Ω Snap-fit Grille

Specifications

Speaker	Coaxial 2-way XS-F1620: Woofer 16 cm (6 3/8 in.), Polypropylene cone type Tweeter: 3 mm (1 3/16 in.) PEI, Balanced dome type XS-F6920: Woofer 16 x 24 cm (6 x 9 in.), polypropylene cone Tweeter: 3.5 mm (1 7/16 in.), PEI, Balanced dome type
Maximum input power	XS-F1620: 140 watts XS-F6920: 160 watts
Rated input power	XS-F1620: 35 watts XS-F6920: 40 watts
Impedance	4 ohms
Sensitivity	90dB / W / m
Frequency response	XS-F1620: 35 - 30,000 Hz XS-F6920: 30 - 30,000 Hz
Crossover frequency	N/A
Mass (per speaker)	XS-F1620: Approx. 675g (1 lb. 8 oz.) XS-F6920: Approx. 1,065 g (2 lb. 6 oz.)

XS-F1620 Dimensions

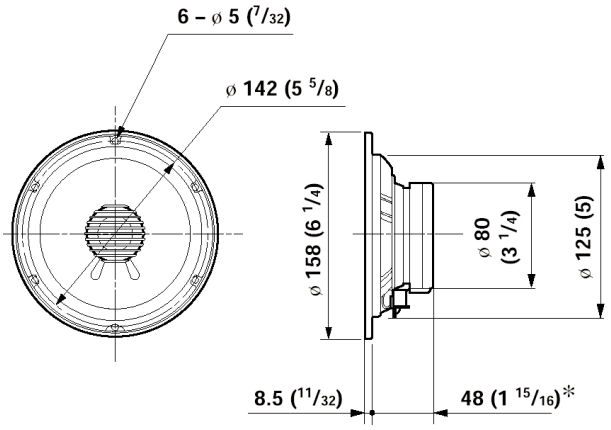

XS-F6920 Dimensions